

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	1.6~30MHz
Coupling	60±1.0dB
Coupling Flatness	±0.1dB max
Insertion Loss	0.1dB max
Primary Line VSWR	1.1:1 max
Coupled Line VSWR	1.5:1 max
Directivity	20dB min
Impedance	50 Ohms
Primary Line Power	3000W(CW)

► Mechanical Data

Primary Line Connectors	N-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	68×38×38mm

► Environmental Data

Operating Temperature	-10℃~+60℃
-----------------------	-----------

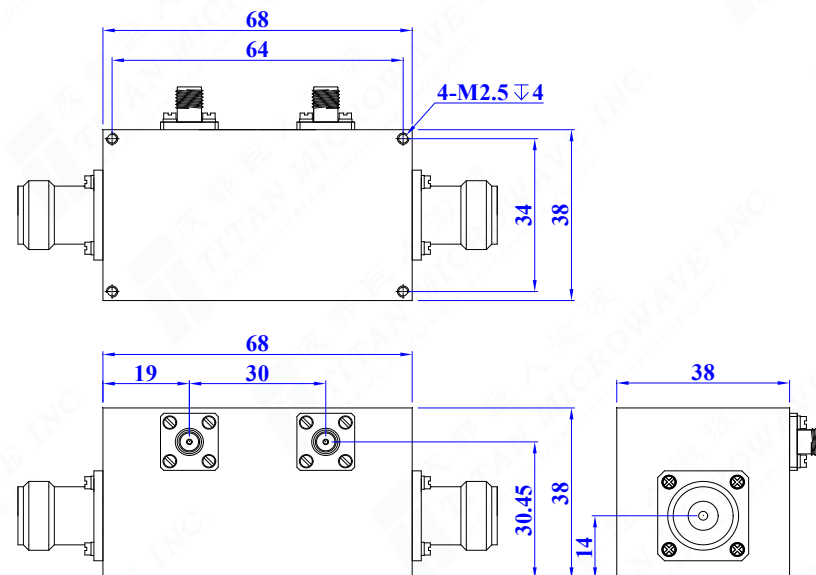

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			TITLE: Dual Directional Coupler, 1.6~30MHz, 60dB, 3000W, N-Female & SMA-Female	成都巨人微波 TITAN MICROWAVE INC. A Professional RF & Microwave Components Supplier www.titan-microwave.com				
ENGINEER: J. Zhu 30/04/25								
APPROVED: C. Chen 30/04/25								
TOLERANCE UNLESS OTHERWISE SPECIFIED								
x	±0.50	[0.019"]	PART No.: TDDC-1.6M30M-60NS3KW	DIMENSIONS IN MILLIMETERS(mm)	SIZE:	SCALE:	SHEET:	REV:
.x	±0.20	[0.008"]			A4		1/1	A
.xx	±0.10	[0.004"]						
ANGLES	±1°							