

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	20~500MHz
Coupling	50±1.2dB max
Coupling Flatness	±1.2dB max
Insertion Loss	0.2dB max
Primary Line VSWR	1.2:1 max
Directivity	18dB min
Impedance	50 Ohms
Primary Line Power	500W(CW)

► Mechanical Data

Primary Line Connectors	N-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	85×44×26mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

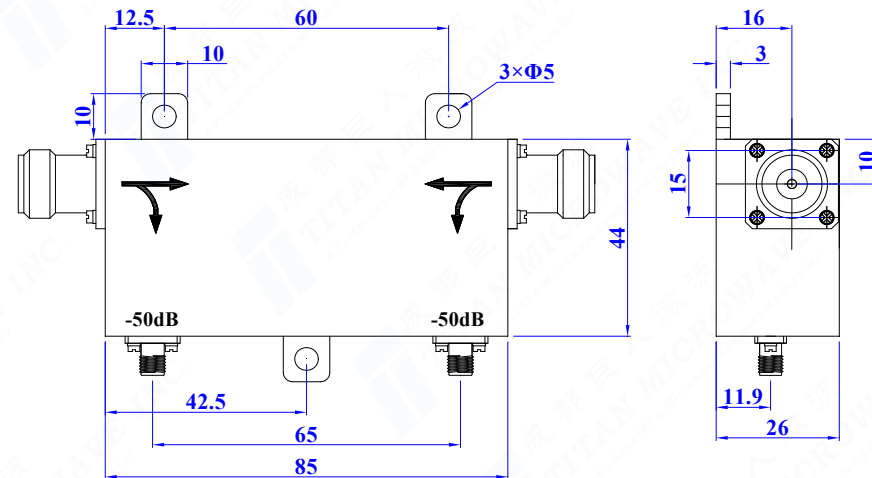

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			TITLE: Dual Directional Coupler, 20~500MHz, 50dB, 500W, N-Female & SMA-Female		成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com					
ENGINEER: J. Zhu 30/04/25										
APPROVED: C. Chen 30/04/25										
TOLERANCE UNLESS OTHERWISE SPECIFIED										
x	±0.50	[0.019"]	PART No.: TDDC-00020050-50NS500		DIMENSIONS IN MILLIMETERS(mm)					
.x	±0.20	[0.008"]								
.xx	±0.10	[0.004"]								
ANGLES	±1°									
			SIZE:		SCALE:		SHEET:		REV:	
			A4				1/1		A	