

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	20~200MHz
Coupling	55±1.0dB max
Coupling Flatness	±1.0dB max
Insertion Loss	0.15dB max
Primary Line VSWR	1.2:1 max
Directivity	19dB min
Impedance	50 Ohms
Primary Line Power	600W(CW), 1000W(PW)

► Mechanical Data

Primary Line Connectors	N-Female & N-Male
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	85×44×26mm


► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

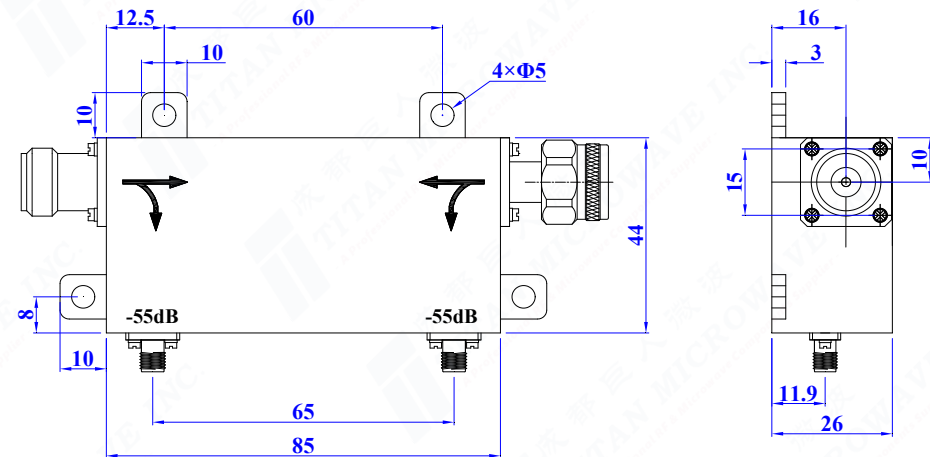

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25	TITLE: Dual Directional Coupler, 20~200MHz, 55dB, 600W, N-Male & Female & SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com		
ENGINEER: J. Zhu 30/04/25				
APPROVED: C. Chen 30/04/25				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x ±0.50 [0.019"]	PART No.: TDDC-00020020-55NS600	 DIMENSIONS IN MILLIMETERS(mm)		
.x ±0.20 [0.008"]				
.xx ±0.10 [0.004"]		SIZE:	SCALE:	SHEET:
ANGLES ±1°		A4		1/1
				REV: A