

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	30~800MHz
Coupling	50±1.0dB max
Coupling Flatness	±1.0dB max
Insertion Loss	0.25dB max
Primary Line VSWR	1.2:1 max
Directivity	18dB min
Impedance	50 Ohms
Primary Line Power	500W(CW)

► Mechanical Data

Primary Line Connectors	N-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	80×81×22mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

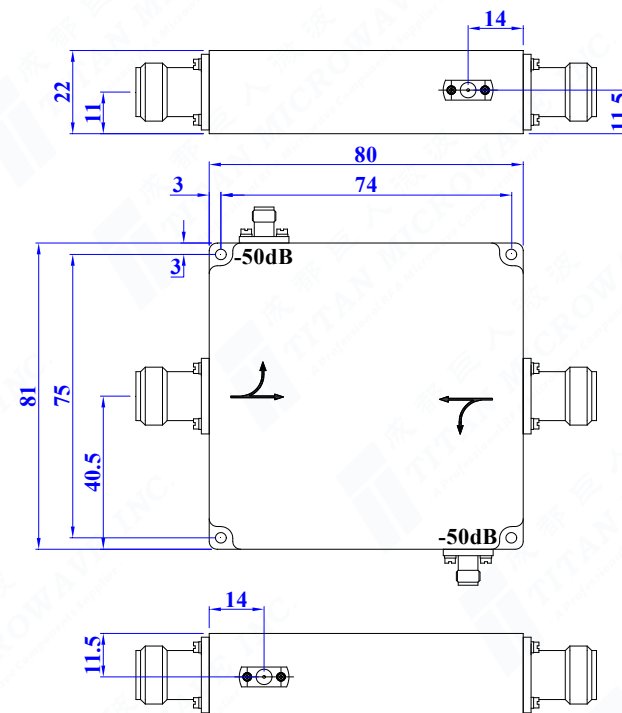

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com
ENGINEER: J. Zhu 30/04/25			
APPROVED: C. Chen 30/04/25			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
TITLE: Dual Directional Coupler, 30~800MHz, 50dB, 500W, N-Female & SMA-Female			
PART No.: TDDC-00030080-50NS500			DIMENSIONS IN MILLIMETERS(mm)
x ±0.50 [0.019"]			SIZE: A4 SCALE: SHEET: 1/1 REV: A
.x ±0.20 [0.008"]			
.xx ±0.10 [0.004"]			
ANGLES ±1°			