

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	1800~2200MHz
Coupling	43±2dB
Insertion Loss	0.3dB max
Primary Line VSWR	1.3:1 max
Directivity	18dB min
Impedance	50 Ohms
Primary Line Power	500W(CW)

► Mechanical Data

Primary Line Connectors	N-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	58×40×25mm

► Environmental Data

Operating Temperature	-40℃~+70℃
-----------------------	-----------

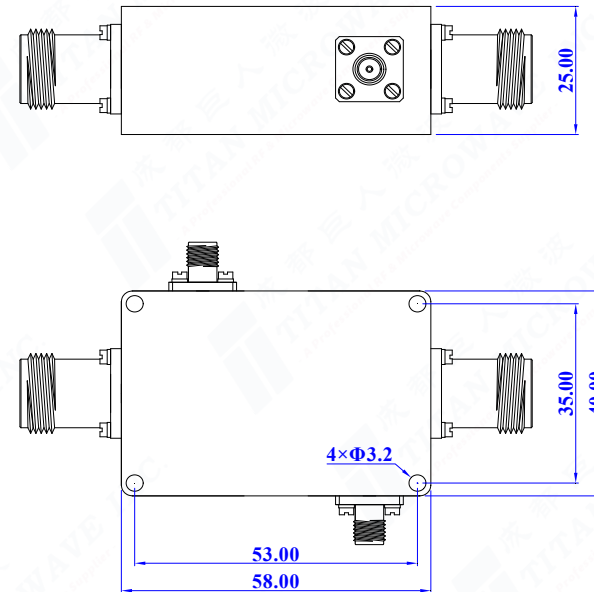

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			TITLE: Dual Directional Coupler, 1800~2200MHZ, 43dB, 500W, N-Female & SMA-Female		<div><div><div></div><div></div></div><div>成都巨人微波</div><div>TITAN MICROWAVE INC.</div><div>- A Professional RF & Microwave Components Supplier -</div></div>			
ENGINEER: J. Zhu 30/04/25								
APPROVED: C. Chen 30/04/25					www.titan-microwave.com			
TOLERANCE UNLESS OTHERWISE SPECIFIED			PART No.: TDDC-01800220-43NS500		<div><div><div></div><div></div></div><div></div><div>DIMENSIONS IN MILLIMETERS(mm)</div></div>			
x ±0.50 [0.019"]								
.x ±0.20 [0.008"]								
.xx ±0.10 [0.004"]								
ANGLES ±1°					SIZE: A4	SCALE:	SHEET: 1/1	REV: A

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	