

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2000~8000MHz
Coupling	40±1.0dB
Insertion Loss	0.5dB max
Primary Line VSWR	1.4:1 max@2~6GHz, 1.6:1 max@6~8GHz
Coupled Line VSWR	1.5:1 max
Directivity	14dB min
Impedance	50 Ohms
Primary Line Power	800W(CW)

► Mechanical Data

Primary Line Connectors	DIN 7/16(L29)-Male
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	60×32.6×32mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

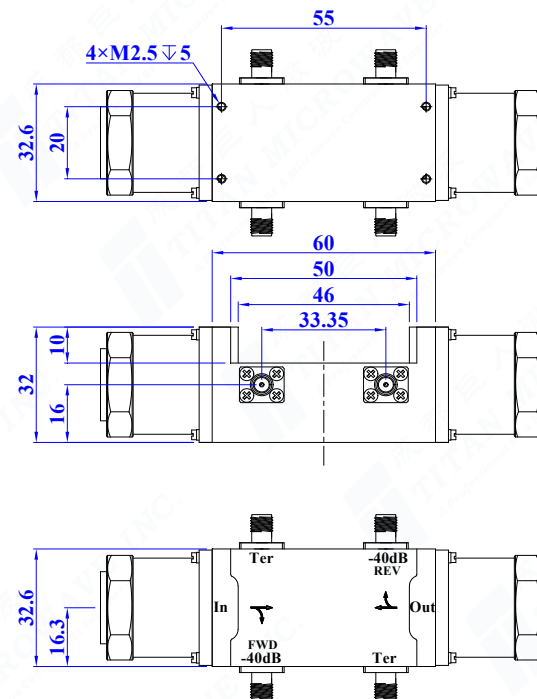

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25		
ENGINEER: J. Zhu 30/04/25		
APPROVED: C. Chen 30/04/25		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Dual Directional Coupler,
2~8GHz, 40dB, 800W,
DIN 7/16(L29)-Male &
SMA-Female

PART No.:

TDDC-02000800-40DS800



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------