

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	400KHz~30MHz
Coupling	50±1.0dB
Coupling Flatness	±0.5dB max
Insertion Loss	0.15dB max
Primary Line VSWR	1.15:1 max
Directivity	25dB min
Impedance	50 Ohms
Primary Line Power	3000W(CW)

### ► Mechanical Data

Primary Line Connectors	N-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	172.4×55.9×55.9mm

### ► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

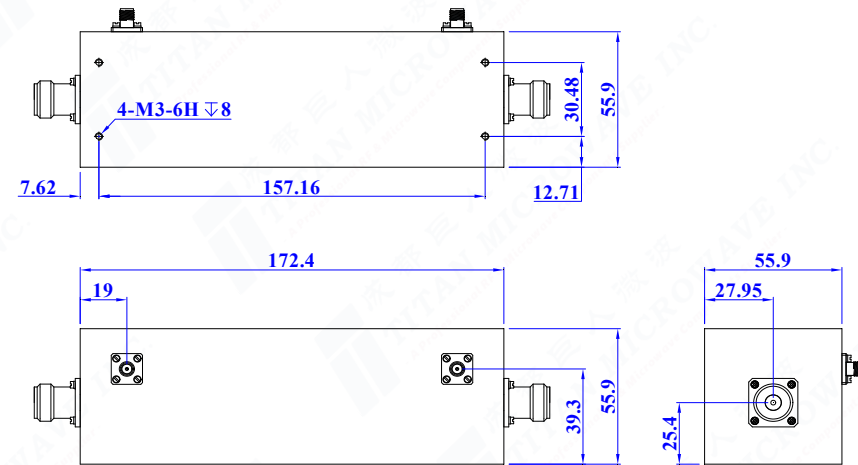

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			<div>TITLE:</div> <div>Dual Directional Coupler, 400KHz~30MHz, 50dB, 3000W, N-Female &amp; SMA-Female</div>		<div><div><div><div></div><div></div></div><div>成都巨人微波</div><div>TITAN MICROWAVE INC.</div><div>- A Professional RF &amp; Microwave Components Supplier -</div></div><div>www.titan-microwave.com</div></div>			
ENGINEER: J. Zhu 30/04/25								
APPROVED: C. Chen 30/04/25								
TOLERANCE UNLESS OTHERWISE SPECIFIED								
x	±0.50	[0.019"]	<div>PART No.:</div> <div>TDDC-400K30M-50NS3KW</div>		<div><div><div><div></div><div></div></div><div></div></div><div>DIMENSIONS IN MILLIMETERS(mm)</div></div>			
.x	±0.20	[0.008"]						
.xx	±0.10	[0.004"]						
ANGLES	±1°							
					SIZE:	SCALE:	SHEET:	REV:
					A4		1/1	A