

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/3/24	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	100~250MHz
Nominal Coupling	20±1.0dB
Coupling Flatness	±0.5dB max
Insertion Loss	0.4dB max
VSWR	1.25:1 max
Directivity	18dB min
Impedance	50 Ohms
Power	200W(CW)

► Mechanical Data

Input/Output Connectors	SMA-Female
Coupled Connector	SMA-Female
Body Material	Aluminum
Surface Finish	Conductive Oxide
Dimensions	100×60×11mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

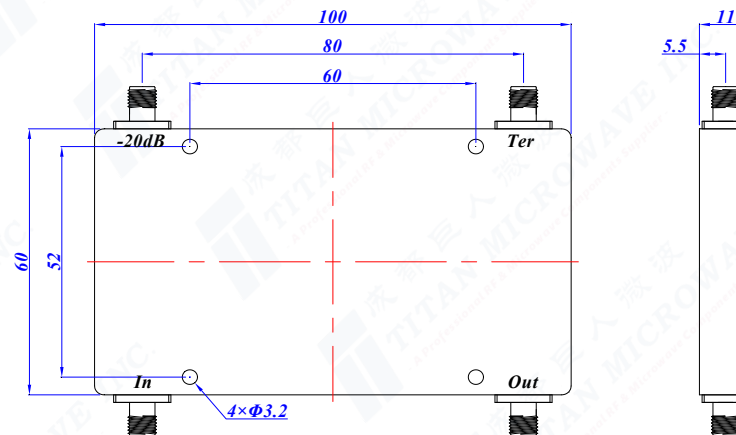

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 24/03/25		
ENGINEER: J. Zhu 24/03/25		
APPROVED: C. Chen 24/03/25		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Single Directional Coupler,
100~250MHz, 20dB,
200W(CW),
SMA-Female

PART No.:

TMDC-00100025-20S200



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------