

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

## TECHNICAL DATA

### Electrical Data


Frequency Range	400~700MHz
Insertion Loss(average)	0.25dB max
VSWR	1.25:1 max
Isolation	20dB min
Phase Balance	±2° max
Amplitude Balance	±0.6dB max@400~500MHz ±0.3dB max@500~700MHz
Power Handling	400W(CW)

### Mechanical Data

Dimensions	25.4×12.7×3.7mm max
Connector Type	SMD
Surface Finish	Immersion Gold

### Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

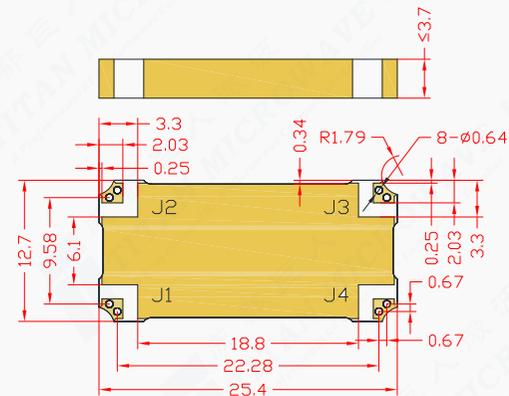

INPUT	J1	J2	J3	J4
J1	-----	-3dB<0°	-3dB<-90°	Isolation
J2	-3dB<0°	-----	Isolation	-3dB<-90°
J3	-3dB<-90°	Isolation	-----	-3dB<0°
J4	Isolation	-3dB<-90°	-3dB<0°	-----

DRAWN: L. Ma 16/04/22		
ENGINEER: J. Zhu 16/04/22		
APPROVED: C. Chen 16/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:  
SMD 90 Degree Hybrid  
Coupler, 3dB,  
400-700MHz, 400W

PART No.:  
TM010037-3



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY