

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	400~700MHz
Insertion Loss	0.4dB max
VSWR	1.2:1 max
Isolation	20dB min
Amplitude Balance	±0.4dB max
Phase Balance	±3°
Impedance	50 Ohms
Power Rating	350W(CW)

### ► Mechanical Data

Connectors	N-Female
Dimensions	80×48×20mm
Surface Finish	Natural Color Conductive Oxidation

### ► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

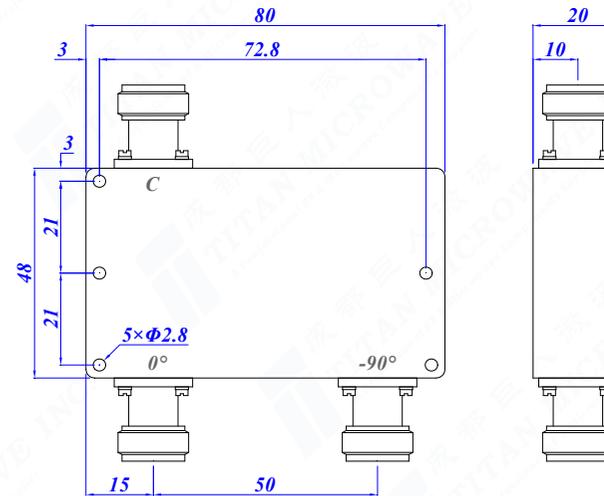

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
3dB 90° Hybrid Coupler,  
400~700MHz, 350W,  
N-Female

**PART No.:**  
TMHC90-00400070-350N

**成都巨人微波**  
**TITAN MICROWAVE INC.**  
- A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

<b>SIZE:</b> A4	<b>SCALE:</b>	<b>SHEET:</b> 1/1	<b>REV:</b> A
--------------------	---------------	----------------------	------------------

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY