

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	800~1000MHz
Insertion Loss	0.4dB max
VSWR	1.3:1 max
Isolation	18dB min
Average Power	200W
Load Power	60W
Pulse Power	2000W(duty cycle 10%)
Direction	Clockwise
Impedance	50 Ohms

Mechanical Data

Dimensions	25.4×25.4×10mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated

Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

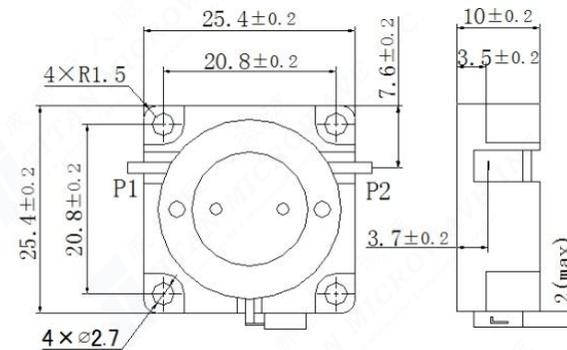

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23	TITLE: Drop-in Isolator 800~1000MHz, Clockwise 200W	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com			
ENGINEER: J. Zhu 16/09/23					
APPROVED: C. Chen 16/09/23		DIMENSIONS IN MILLIMETERS(mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED	PART No.: TMDI-00800100-200A	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
x ±0.50 [0.019"]					
.x ±0.20 [0.008"]					
.xx ±0.10 [0.004"]					
ANGLES ±1°					