

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	1000~1200MHz
Insertion Loss	0.3dB max
VSWR	1.2:1 max
Isolation	20dB min
Average Power	200W
Load Power	40W
Pulse Power	2000W(duty cycle 10%)
Direction	Clockwise
Impedance	50 Ohms

Mechanical Data

Dimensions	20×20×8mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated

Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

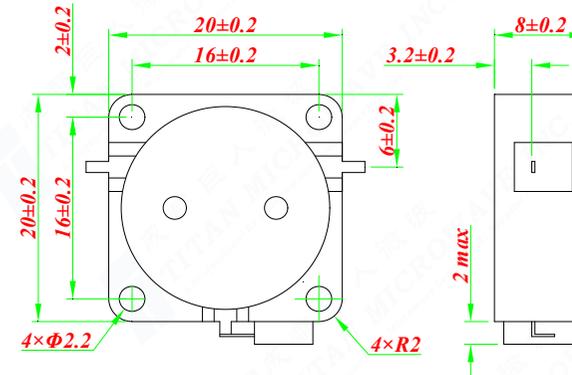

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23	TITLE: Drop-in Isolator 1000~1200MHz, Clockwise 200W	 成都巨人微波 TITAN MICROWAVE INC. <small>- A Professional RF & Microwave Components Supplier -</small> www.titan-microwave.com		
ENGINEER: J. Zhu 16/09/23				
APPROVED: C. Chen 16/09/23		PART No.: TMDI-200-01000120	 DIMENSIONS IN MILLIMETERS(mm)	
TOLERANCE UNLESS OTHERWISE SPECIFIED	SIZE: A4			
x ±0.50 [0.019"]				
.x ±0.20 [0.008"]				
.xx ±0.10 [0.004"]				
ANGLES ±1°				