

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	1800~2000MHz
Insertion Loss	0.3dB max
VSWR	1.2:1 max
Isolation	20dB min
Average Power	200W
Load Power	40W
Pulse Power	2000W(duty cycle 10%)
Direction	Clockwise
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	16×16×7mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated

### ► Environmental Data

Operating Temperature	-55°C~+85°C
-----------------------	-------------

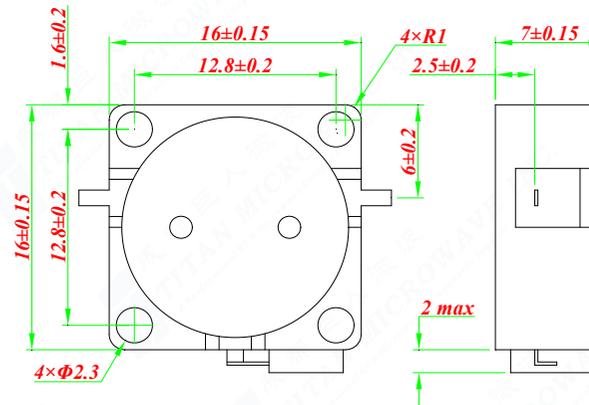

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23		
ENGINEER: J. Zhu 16/09/23		
APPROVED: C. Chen 16/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Drop-in Isolator  
1800~2000MHz,  
Clockwise  
200W

**PART No.:**  
TMDI-200-01800200

**成都巨人微波**  
**TITAN MICROWAVE INC.**  
- A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

<b>SIZE:</b> A4	<b>SCALE:</b>	<b>SHEET:</b> 1/1	<b>REV:</b> A
--------------------	---------------	----------------------	------------------