

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	2700~3100MHz
Insertion Loss	0.3dB max
VSWR	1.2:1 max
Isolation	20dB min
Average Power	200W
Load Power	20W
Pulse Power	2000W(duty cycle 25%)
Direction	Clockwise
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	13×13×8mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated

### ► Environmental Data

Operating Temperature	-55°C~+85°C
-----------------------	-------------

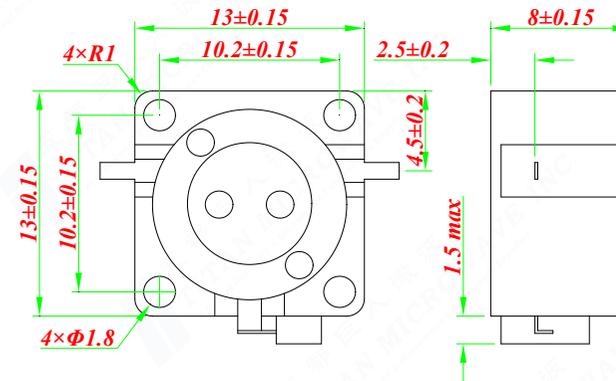

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23		
ENGINEER: J. Zhu 16/09/23		
APPROVED: C. Chen 16/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

#### TITLE:

Drop-in Isolator  
2700~3100MHz,  
Clockwise  
200W

#### PART No.:

TMDI-200-02700310



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE:  
A4

SCALE:

SHEET:  
1/1

REV:  
A