

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	4000~5000MHz
Insertion Loss	0.4dB max
VSWR	1.25:1 max
Isolation	20dB min
Average Power	100W
Load Power	20W
Pulse Power	1000W(duty cycle 25%)
Direction	Clockwise
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	16×16×6.4mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated

### ► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

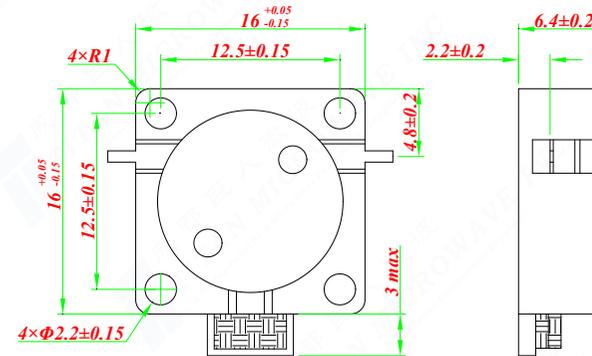

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23	TITLE: Drop-in Isolator 4000~5000MHz, Clockwise 100W	 www.titan-microwave.com		
ENGINEER: J. Zhu 16/09/23				
APPROVED: C. Chen 16/09/23		PART No.: TMDI-04000500-100	DIMENSIONS IN MILLIMETERS(mm)	
TOLERANCE UNLESS OTHERWISE SPECIFIED	SIZE: A4		SCALE:	SHEET: 1/1
x ±0.50 [0.019"]				
.x ±0.20 [0.008"]				
.xx ±0.10 [0.004"]				
ANGLES ±1°				