

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

## TECHNICAL DATA

### Electrical Data


Frequency Range	5500~6500MHz
Insertion Loss	0.4dB max
VSWR	1.2:1 max
Isolation	20dB min
Average Power	50W
Load Power	20W
Pulse Power	500W(duty cycle 25%)
Direction	Clockwise
Impedance	50 Ohms

### Mechanical Data

Dimensions	9×14×5.1mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated

### Environmental Data

Operating Temperature	-55°C~+85°C
-----------------------	-------------

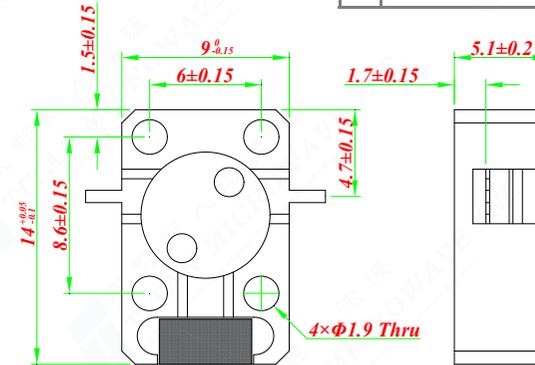

DRAWN: L. Ma 16/09/23		
ENGINEER: J. Zhu 16/09/23		
APPROVED: C. Chen 16/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Drop-in Isolator  
5500~6500MHz,  
Clockwise  
50W

**PART No.:**  
TMDI-05500650-50



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

**Notes:**

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY