

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2021/3/13	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	2000~3000MHz
Insertion Loss	0.4dB max
Isolation	18dB min
VSWR	1.3:1 max
Impedance	50 Ohms
Forward Power(CW)	150W
Reverse power	100W
Rotation	Clockwise


► Mechanical Data

Input/Output Connectors	SMA-Female
Material	Aluminum
Surface Treatment	Nicke Plated
Dimensions	32×44×21mm
Weight	100g

► Environmental Data


Operating Temperature	-10℃~+60℃
Storage Temperature	-50℃~+90℃

All the materials are RoHS Compliance

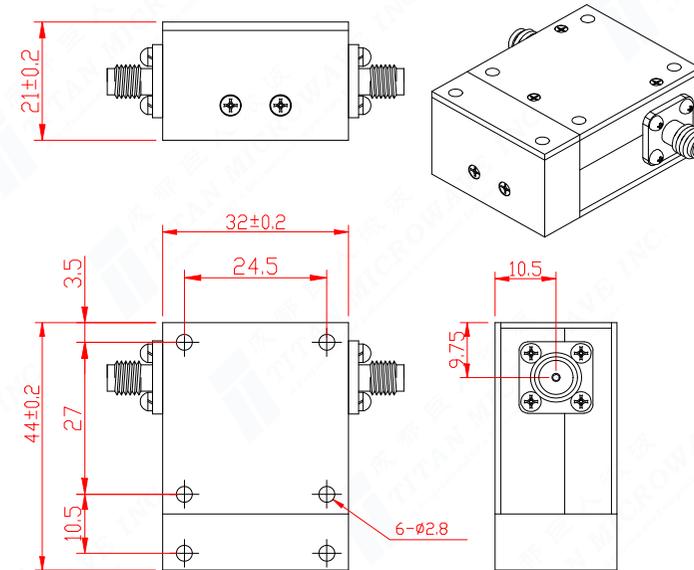

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 13/03/21	TITLE: Coaxial Isolator, 2000~3000MHz, 150W, SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. <small>- A Professional RF & Microwave Components Supplier -</small>		www.titan-microwave.com		
ENGINEER: J. Zhu 13/03/21						
APPROVED: C. Chen 13/03/21		PART No.: TMCI-02000300-150S	 DIMENSIONS IN MILLIMETERS(mm)	SIZE: A4	SCALE:	SHEET: 1/1
TOLERANCE UNLESS OTHERWISE SPECIFIED						
x ±0.50 [0.019"]						
.x ±0.20 [0.008"]						
.xx ±0.10 [0.004"]						
ANGLES ±1°						