

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	2000~4000MHz
Insertion Loss	0.8dB max
VSWR	1.3:1 max
Isolation	17dB min
Forward Power	100W
Pulse Power	1000W(duty cycle 10%)
Direction	Clockwise
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	30.5×30.5×17mm
Connector	SMA-Female
Material	Aluminum
Surface Finish	Nickel Plated

### ► Environmental Data

Operating Temperature	-40℃~+70℃
-----------------------	-----------

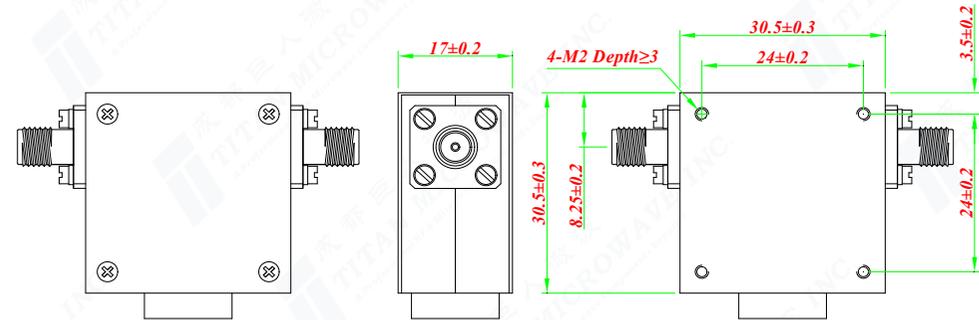

DRAWN: L. Ma 16/09/23		
ENGINEER: J. Zhu 16/09/23		
APPROVED: C. Chen 16/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Coaxial Isolator  
2-4GHz,  
100W, SMA-Female

**PART No.:**  
TMCI-02000400-100S

**成都巨人微波**  
**TITAN MICROWAVE INC.**  
- A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

**Notes:**

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY