

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	2000~6000MHz
Insertion Loss	1.6dB max
VSWR	1.6:1 max
Isolation	13dB min
Forward Power	100W
Pulse Power	1000W(duty cycle 10%)
Direction	Clockwise
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	30.5×30.5×15mm
Connector	SMA-Female
Material	Aluminum
Surface Finish	Nickel Plated

### ► Environmental Data

Operating Temperature	-40℃~+70℃
-----------------------	-----------

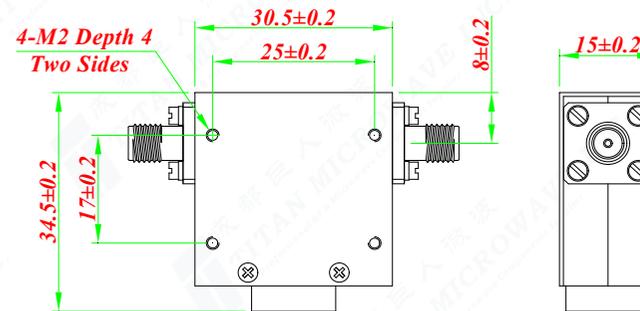

DRAWN: L. Ma 16/09/23		
ENGINEER: J. Zhu 16/09/23		
APPROVED: C. Chen 16/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Coaxial Isolator  
2-6GHz,  
100W, SMA-Female

PART No.:

TMCI-02000600-100S

成都巨人微波  
**TITAN MICROWAVE INC.**  
- A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE:  
A4

SCALE:

SHEET:  
1/1

REV:  
A

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY