

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	0.9~1.3GHz
Insertion Loss	0.6dB max
VSWR	1.3:1 max
Isolation	18dB min
Forward Power	100W
Reverse Power	30W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	34×34×22mm
Connector	SMA-Female
Material	Aluminum
Surface Finish	Nickel Plated

► Environmental Data

Operating Temperature	-30℃~+70℃
-----------------------	-----------

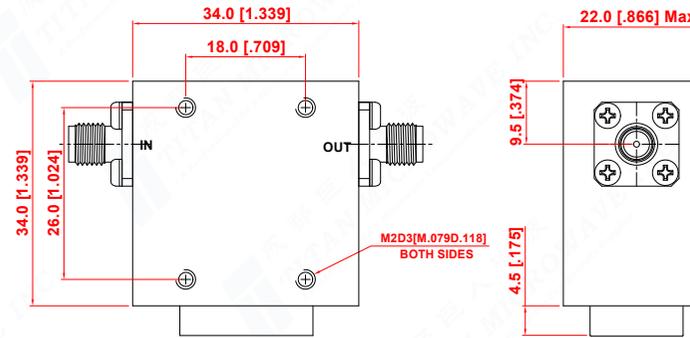

DRAWN: L. Ma 16/09/23
ENGINEER: J. Zhu 16/09/23
APPROVED: C. Chen 16/09/23
TOLERANCE UNLESS OTHERWISE SPECIFIED

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Coaxial Isolator
0.9-1.3GHz,
100W, SMA-Female

PART No.:
TMCI-00900130-100S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY