

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	800~1000MHz
Insertion Loss	0.25dB max
VSWR	1.2:1 max
Isolation	23dB min
Forward Power	500W
Reverse Power	30W
Direction	Clockwise
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	53×56×20mm
Connector	N-Female
Material	Aluminum
Surface Finish	Nickel Plated

### ► Environmental Data

Operating Temperature	-40℃~+85℃
Storage Temperature	-55℃~+90℃

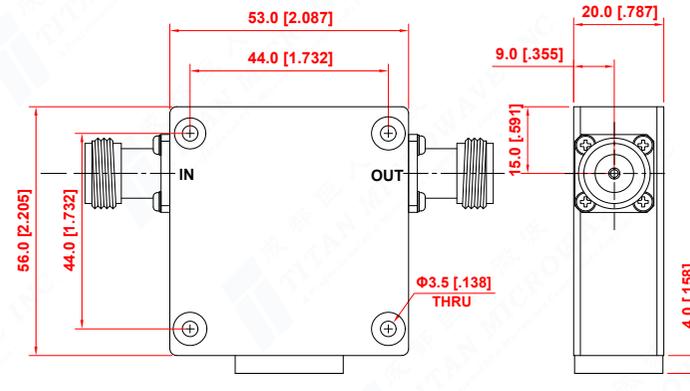

DRAWN: L. Ma 16/09/23		
ENGINEER: J. Zhu 16/09/23		
APPROVED: C. Chen 16/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:  
Coaxial Isolator  
800-1000MHz,  
500W, N-Female

PART No.:  
TMCI-00800100-500N

成都巨人微波  
**TITAN MICROWAVE INC.**  
- A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY