

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	800~4200MHz
Insertion Loss(average)	0.5dB max
VSWR	1.4:1 max
Isolation	16dB min
Phase Balance	±5° max
Amplitude Balance	±0.8dB max
Power Handling	200W(CW)

► Mechanical Data

Dimensions	31.75×19.05×2.7mm max
Connector Type	SMD
Surface Finish	Immersion Gold

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

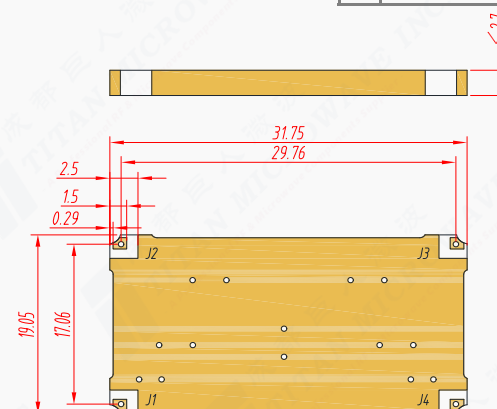

INPUT	J1	J2	J3	J4
J1	-----	-3dB<0°	-3dB<-90°	ISOLATION
J2	-3dB<0°	-----	ISOLATION	-3dB<-90°
J3	-3dB<-90°	ISOLATION	-----	-3dB<0°
J4	ISOLATION	-3dB<-90°	-3dB<0°	-----

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22		
ENGINEER: J. Zhu 16/04/22		
APPROVED: C. Chen 16/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:	SMD 90 Degree Hybrid Coupler, 3dB, 800-4200MHz, 200W	
	PART No.: TM010510-3	

 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
www.titan-microwave.com			
 DIMENSIONS IN MILLIMETERS(mm)			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A