

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/5/14	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	2000~2150MHz
Insertion Loss(average)	0.2dB max
VSWR	1.25:1 max
Isolation	18dB min
Phase Balance	±3° max
Amplitude Balance	±0.25dB max
Power Handling	800W

► Mechanical Data

Dimensions	60×25×12mm
Connector Type	Drop-in
Surface Finish	Natural Color Conductive Oxidation

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

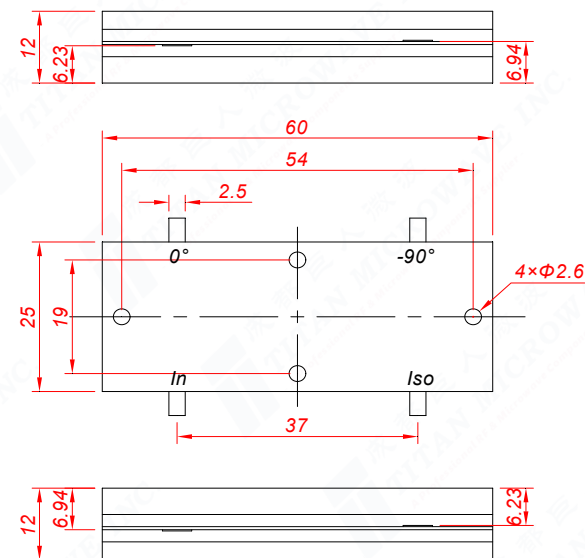

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 14/05/22	TITLE: Drop-in 90 Degree Hybrid Coupler, 2000-2150MHz, 800W	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
ENGINEER: J. Zhu 14/05/22		 DIMENSIONS IN MILLIMETERS(mm)			
APPROVED: C. Chen 14/05/22					
TOLERANCE UNLESS OTHERWISE SPECIFIED					
x ±0.50 [0.019"]	PART No.: TMF013124-3	SIZE:	SCALE:	SHEET:	REV:
.x ±0.20 [0.008"]		A4		1/1	A
.xx ±0.10 [0.004"]					
ANGLES ±1°					