PART NUMBER
TBF-01350139-35S

REV.	DATE	COMMENTS	INITIAL
1	2020/1/2	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range 1350-1390MHz
Center Frequency(F_0) 1370MHz
Passband Insertion Loss ..... 0.8dB max
Passband Ripple ..... 0.25dB max
Passband Return Loss ..... 23dB min
Stopband Rejection ..... 35dB min@DC-1300MHz
..... 35dB min@1440-7000MHz
Power Handling ..... 10W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... SMA-Female(Removable)
Housing Material ..... 6061 Aluminum Alloy
Finish ..... Silver Color
Weight 100g

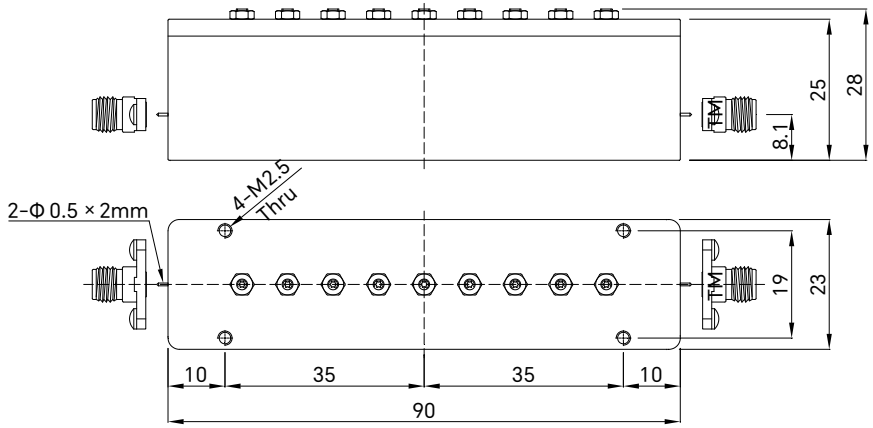

Drawing not to scale, units:mm

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER		DESCRIPTION
TBF-01350139-35S		Cavity Band Pass Filter, Passband 1350-1390MHz Stopband Rejection 35dB, 10W, SMA-Female
CAGE CODE	SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.