PART NUMBER
TBF-03420352-N40

REV.	DATE	COMMENTS	INITIAL
1	2020/7/25	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range 3420-3520MHz
Center Frequency(F_0) 3470MHz
Passband Insertion Loss ..... 1.3dB max
Passband Ripple ..... 0.6dB max
Passband Return Loss ..... 20dB min
Stopband Rejection ..... 40dB min@DC-3390MHz
..... 40dB min@3550-6000MHz
Power Handling ..... 100W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... N-Female
Housing Material ..... Aluminum 6061
Finish ..... Black Painted
Weight 270g

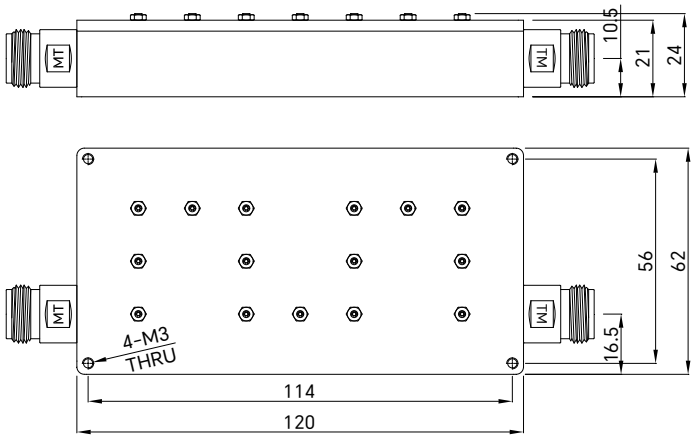

Drawing not to scale, units:mm

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER		DESCRIPTION
TBF-03420352-N40		Cavity Band Pass Filter, Passband 3.42-3.52GHz Stopband Rejection 40dB, 100W, N-Female
CAGE CODE	SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.