


TMPD2-06002650-20S

6 to 26.5 GHz, 20W, SMA Female
2-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	6~26.5GHz
INSERTION LOSS	0.6dB max.
(excluding theoretical insertion loss 3.0dB)	
AMPLITUDE BALANCE	±0.3dB
PHASE BALANCE	±3 Deg.
VSWR(input port)	1.28 typ. & 1.6 max.
VSWR(output port)	1.26 typ. & 1.5 max.
ISOLATION	22dB typ. & 16dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	20W
POWER RATING(as a combiner)	1W

Outline Drawing(mm[inch])

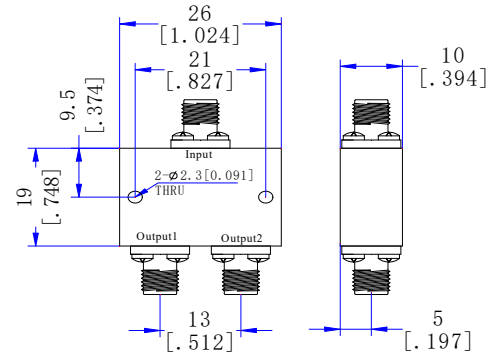

Mechanical and Environmental Characteristics

Dimensions	26×19×10mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-45°C ~ +85°C
Weight	21g