


## TMPD16-06001800-20SA

**6 to 18 GHz, 20W, SMA Female  
 16-WAY POWER DIVIDER**

### Electrical Characteristics

<b>FREQUENCY RANGE</b> .....	6000~18000MHz
<b>INSERTION LOSS</b> .....	1.8dB max.
(excluding theoretical insertion loss 12.0dB)	
<b>AMPLITUDE BALANCE</b> .....	±0.8dB
<b>PHASE BALANCE</b> .....	±8 Deg.
<b>VSWR(input port)</b> .....	1.42 typ. & 1.5 max.
<b>VSWR(output ports)</b> .....	1.25 typ. & 1.5 max.
<b>ISOLATION</b> .....	26dB typ. & 17dB min.
<b>IMPEDANCE</b> .....	50 Ohms
<b>POWER RATING(as a divider)</b> .....	20W
<b>POWER RATING(as a combiner)</b> .....	1W

### Outline Drawing(mm[inch])

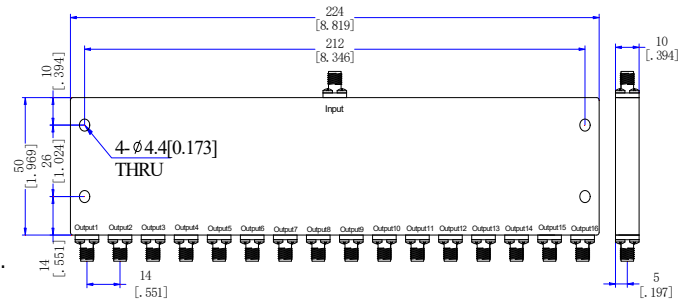

### Mechanical and Environmental Characteristics

<b>Dimensions</b> .....	50×224×10mm
<b>RF Connectors</b> .....	SMA female
<b>Surface Finishing</b> .....	Black Paint
<b>Operating Temperature</b> .....	-45°C ~ +85°C
<b>Weight</b> .....	390g