

TMDC-02001800-10S50 2-18 GHz, 10dB, 50W, SMA Female

FEATURES

- ❖ Wide Band Operation 2-18 GHz
- ❖ Power Handle Capability up to 50W
- ❖ 10 dB Typical Coupling
- ❖ Low Insertion Loss


APPLICATIONS

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units
Frequency Range	2	-	18	GHz
Impedance	-	50	-	Ohms
Nominal Coupling	9	10	11	dB
Frequency Sensitivity	-	±0.9	±1.0	dB
Directivity	10	-	-	dB
Insertion Loss(Excluding coupling loss)	-	-	1.0	dB
Insertion Loss(True)	-	-	-	dB
VSWR Primary	-	1.25	1.5	:1
VSWR Secondary	-	1.25	1.5	:1
Average Power		50		W
Peak Power		-		W
Operating Temperature		-45°C~+85°C		
Storage Temperature		-50°C~+105°C		
Input/Output Connectors		SMA female		
Weight		35g		
Surface Finishing		Gray/Black Paint		
Material		Aluminum		

Outline Drawing [mm[inch]]

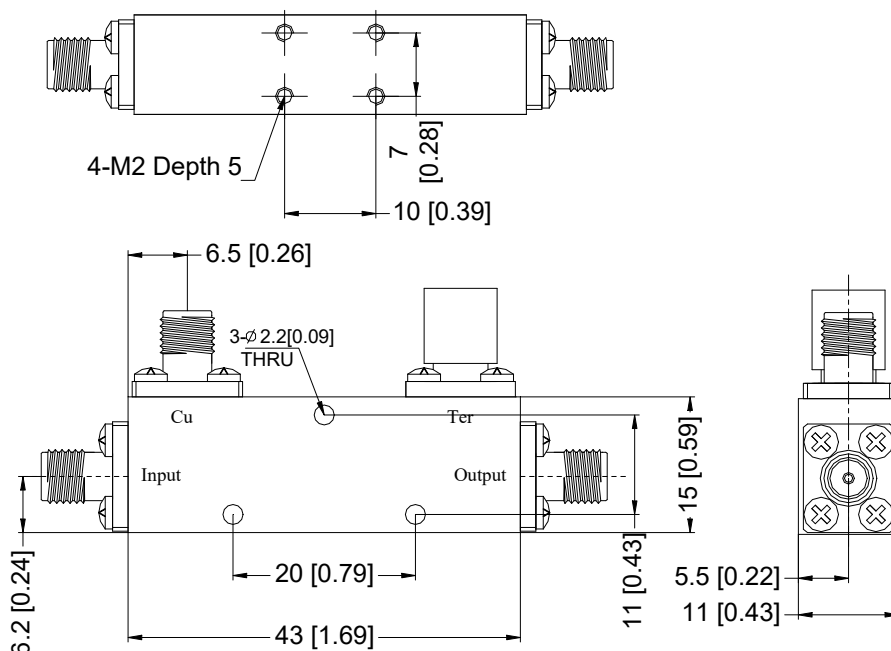

Tolerances ±0.5[0.02]