

**TMDC-02001800-16S50 2-18 GHz, 16dB, 50W, SMA Female**

**FEATURES**

- ❖ Wide Band Operation 2-18 GHz
- ❖ Power Handle Capability up to 50W
- ❖ 16 dB Typical Coupling
- ❖ Low Insertion Loss


**APPLICATIONS**

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

**SPECIFICATIONS**

Parameters	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	2	-	8	8	-	18	GHz
Impedance	-	50	-	-	50	-	Ohms
Nominal Coupling	15	16	17	15	16	17	dB
Frequency Sensitivity	-	±0.5	±0.7	-	±0.5	±0.7	dB
Directivity	15	16	-	12	14	-	dB
Insertion Loss(Excluding coupling loss)	-	-	0.5	-	-	0.5	dB
Insertion Loss(True)	-	0.35	0.5	-	0.45	0.7	dB
VSWR Primary	-	1.3	1.4	-	1.35	1.4	:1
VSWR Secondary	-	1.4	1.5	-	1.4	1.5	:1
Average Power	50						W
Peak Power	500(10% Duty Cycle, 1μs Pulse Width)						W
Operating Temperature	-40°C~+85°C						
Storage Temperature	-50°C~+105°C						
Input/Output Connectors	SMA female						
Weight	40g						
Surface Finishing	Gray Paint						
Material	Aluminum						

**Outline Drawing [mm[inch]]**

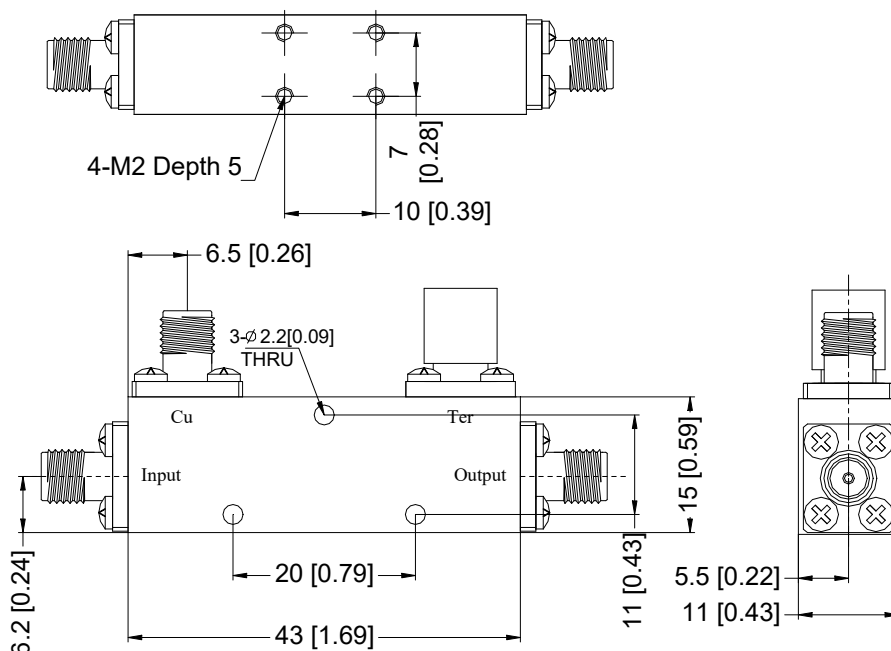

Tolerances ±0.5[0.02]