

TMDC-07501600-20S20 7.5-16 GHz, 20dB, 20W, SMA Female

FEATURES

- ❖ Wide Band Operation 7.5-16 GHz
- ❖ Power Handle Capability up to 20W
- ❖ 20 dB Typical Coupling
- ❖ Low Insertion Loss


APPLICATIONS

- ❖ Frequency Measurements
- ❖ Signal Levelling, Signal Sampling
- ❖ Signal Injection
- ❖ Reflection Coefficient Measurements
- ❖ Measure incident and reflected power to determine VSWR

SPECIFICATIONS

Parameters	Min.	Typ.	Max.	Units
Frequency Range	7.5	-	16	GHz
Impedance	-	50	-	Ohms
Nominal Coupling	19.2	20	20.8	dB
Frequency Sensitivity	-	±0.5	±0.6	dB
Directivity	12	14	-	dB
Insertion Loss(Excluding coupling loss)	-	-	0.7	dB
VSWR Primary	-	1.25	1.5	:1
VSWR Secondary	-	1.25	1.5	:1
Average Power	20			W
Operating Temperature	-55°C~+85°C			
Storage Temperature	-50°C~+105°C			
Input/Output Connectors	SMA female			
Weight	30g			
Surface Finishing	Gray/Black Paint			
Material	Aluminum			

Outline Drawing [mm[inch]]

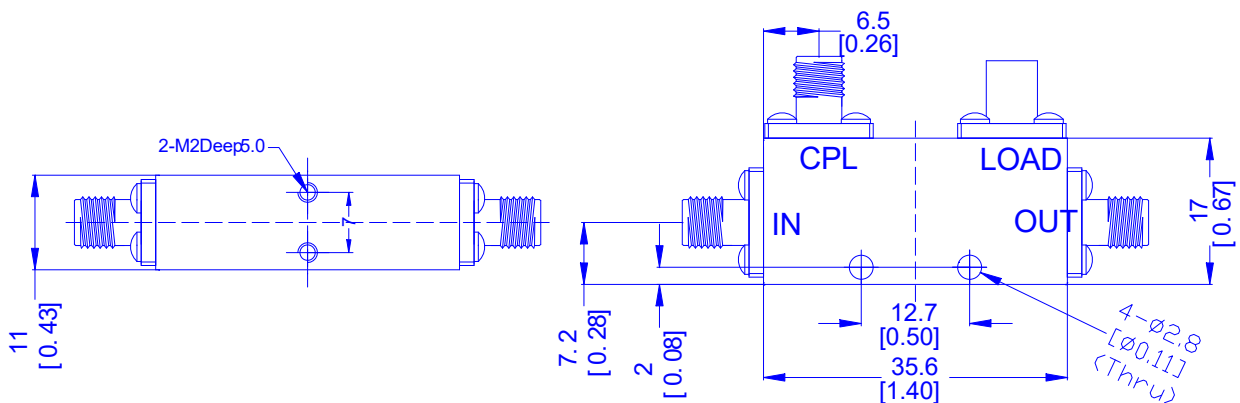

Tolerances ±0.5[0.02]