

**SPECIFICATIONS**

Frequency Range:	DC~18GHz
Input Avg Power:	50W@25°C
Impedance:	50 Ohms
Attenuation:	1-50dB
VSWR:	1.35 max.
Connector:	SMA-Male to SMA-Female
Operating Temp.:	-55°C~+125°C
Connector Body:	Gold plated brass / Stainless steel
Female Center Contact:	Gold plated beryllium copper
Male Center Contact:	Gold plated brass
Heat Sink:	Black anodized aluminum
Dimensions:	Ø41×70 mm
RoHS Status:	RoHS Compliant


**Maximum Deviation over Frequency**

Nominal ATTN(dB)	Frequency Range(GHz)			
	DC~4	DC~8	DC~12.4	DC~18
1~10	±0.4	±0.5	±0.6	±0.8
20	±0.5	±0.6	±0.7	±0.9
30	±0.7	±0.8	±0.8	±1.1
40-50	±0.7	±0.8	±1.1	±1.3
VSWR(Max.)	1.2	1.25	1.3	1.35

**Ordering Information**

<b>TMFA18</b>	<b>X</b>	<b>S</b>	<b>50A</b>	<b>-</b>	<b>XX</b>
					Attenuation dB value
					Average Power(W)
					RF Connector (S:SMA male to SMA female)
					Maximum Frequency(GHz) 03: DC~3 GHz 12: DC~12.4 GHz 18: DC~18 GHz
					Titan Microwave Fixed Attenuator

**Power/Temp Rating Curve**

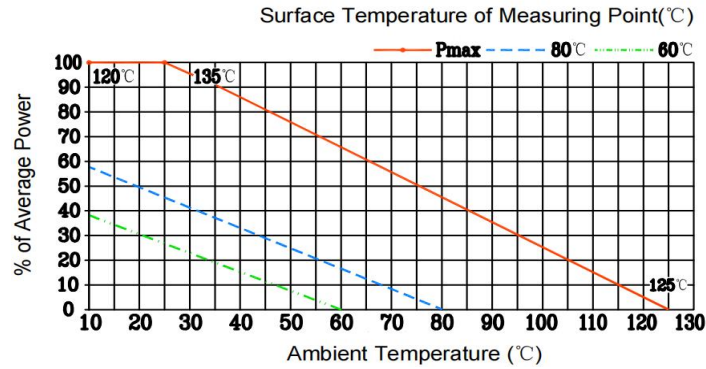

**Dimensions [mm]**

