

SPECIFICATIONS

Frequency Range:	DC~40 GHz
Input Avg Power:	2W@25°C, 0.5W@125°C
Peak Power:	200W(5μs Pulse Width, 0.5% Duty Cycle)
Impedance:	50 Ohms
Attenuation:	1-30dB
VSWR:	1.4 max.
Connector:	2.4-Male and 2.4-Female
Operating Temp.:	-55°C~+100°C
Connector Body:	Stainless Steel
Female Center Contact:	Gold plated beryllium copper
Male Center Contact:	Gold plated brass
Weight:	5g
Dimensions:	Ø8×29 mm
RoHS Status:	RoHS Compliant


Maximum Deviation over Frequency

Frequency Range(GHz)	Nominal Attenuation (dB)			
	1-9	10	20	30
DC-40	±1.0	±1.0	-1.0/+1.5	±1.5

Ordering Information

TMFA	40	W	2	-	XX
					XX: Attenuation dB value
					Average Power(W)
					RF Connector (W: 2.4mm-Male and 2.4mm-Female)
					Maximum Frequency(GHz) 40: DC~40 GHz
					Titan Microwave Fixed Attenuator

Power/Temp Rating Curve

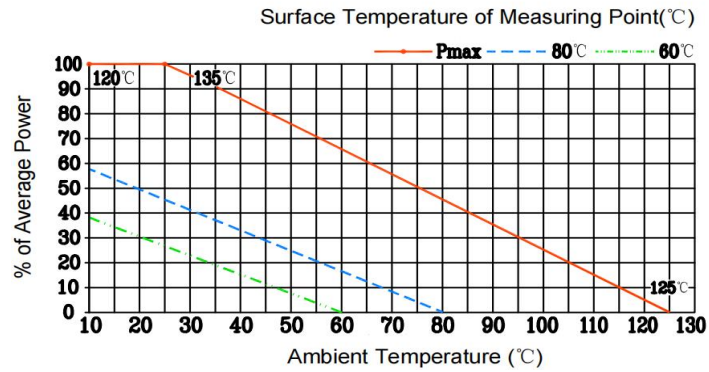

Outline Drawing[mm]

