PART NUMBER

TMDB-00540-KMKF

REV.	DATE	COMMENTS	INITIAL
1	2022/8/16	ENGINEERING RELEASE	

RoHS Compliant

Electrical Data

Frequency Range 0.005~40GHz


Insertion Loss $\leq 0.5 dB$ VSWR ≤ 1.30 DC Voltage60 VoltsImpedance50 Ohm

Operational Temperature $-55^{\circ}\text{C} \sim +165^{\circ}\text{C}$ Storage Temperature $-55^{\circ}\text{C} \sim +165^{\circ}\text{C}$

Body Material Stainless Steel 303

Inner Conductor Glod Plated Beryllium Copper
Connectors 2.92mm-Male to 2.92mm-Female

Relative Humidity 0~90%

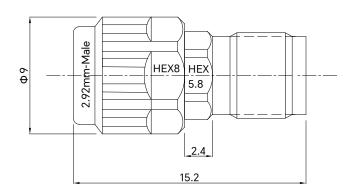

Drawing not to scale, units:mm



www.titan-microwave.com Tel: +86 130 866 58398

Email: sales@titan-microwave.com chris@titan-microwave.com

PART NUMBER TMDB-00540-KMKF		DESCRIPTION DC Block, 0.005-40GHz, 60V 2.92mm-Male to 2.92mm-Female
CAGE CODE	SIGNATURE	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		