


PART NUMBER TDDC-06004000-30K20	REV.	DATE	COMMENTS	INITIAL
	1	2020/7/25	ENGINEERING RELEASE	

Specifications

Frequency Range	6-40GHz
Impedance	50 Ohms
Coupling	30±1.0dB max
Directicity	10dB min
VSWR Primary	1.7 max
Insertion Loss	1.3dB max
Average Power	20W max
Input/Output Connectors	2.92mm-Female
Coupling Connectors	2.92mm-Female
Operational Temperature	-55°C~+85°C
Storage Temperature	-55°C~+100°C
Dimensions	44×24×12.7mm
Body Material	Aluminum

RoHS Compliant

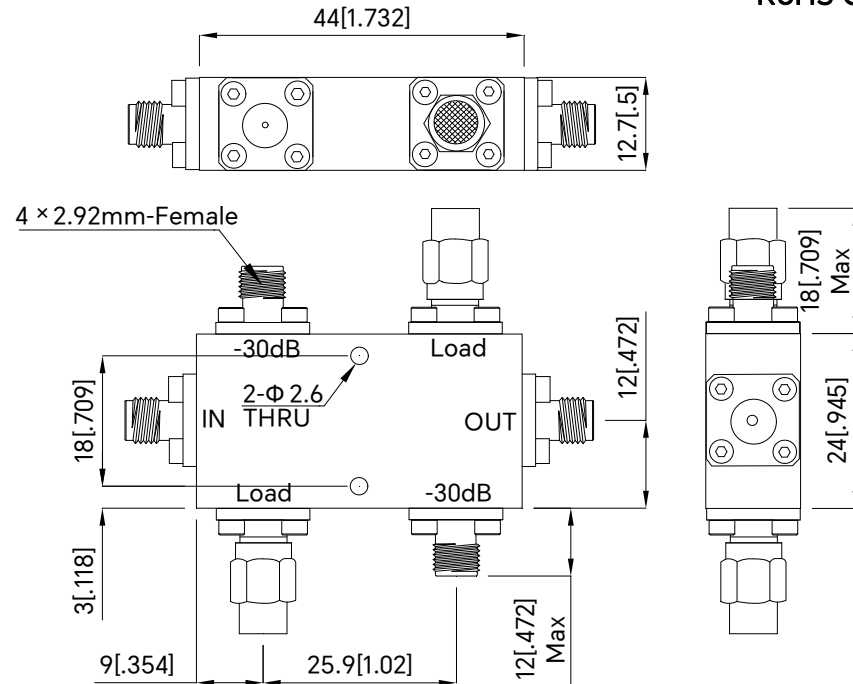

Drawing not to scale, units:mm



www.titan-microwave.com
 Tel: +86 130 866 58398
 Email: sales@titan-microwave.com
 chris@titan-microwave.com

PART NUMBER TDDC-06004000-30K20		DESCRIPTION Dual Directional Coupler, 6-40GHz 30dB Coupling, 20W, 2.92mm-Female
CAGE CODE	SIGNATURE	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		