PART NUMBER
TBF-02750344-80S

REV.	DATE	COMMENTS	INITIAL
1	2020/8/2	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range 2750-3439MHz
Center Frequency(F_0) 3094.5MHz
Passband Insertion Loss ..... 1.0dB max
Passband Ripple ..... 0.65dB max
Passband Return Loss ..... 20dB min
Stopband Rejection ..... 80dB min@DC-2593MHz
..... 80dB min@3560-9000MHz
Power Handling ..... 5W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... SMA-Female(Removable)
Housing Material ..... Aluminum 6061
Finish ..... Black Painted
Weight 140g

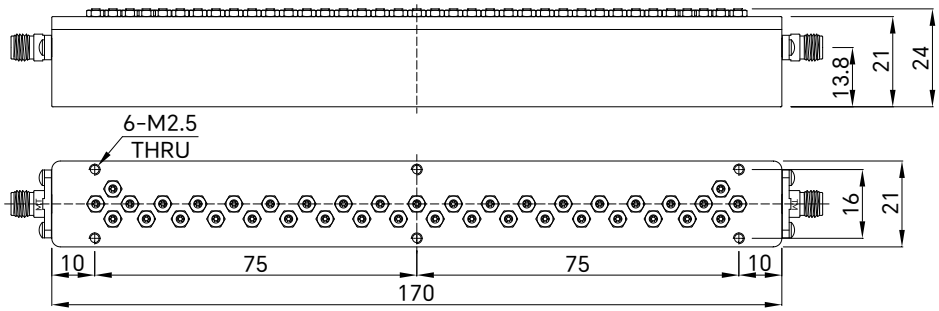

Drawing not to scale, units:mm[inch]

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER	DESCRIPTION
TBF-02750344-80S	Comb Band Pass Filter, Passband 2.75~3.439GHz Stopband Rejection 80dB, 5W, SMA-Female
CAGE CODE / SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.