PART NUMBER
TBF-02600270-90S

REV.	DATE	COMMENTS	INITIAL
1	2020/7/25	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range 2600-2700MHz
Center Frequency(F_0) 2650MHz
Passband Insertion Loss ..... 0.7dB max
Passband Ripple ..... 0.2dB max
Passband Return Loss ..... 20dB min
Stopband Rejection ..... 90dB min@DC-1850MHz
..... 90dB min@3450-9000MHz
Power Handling ..... 20W max
Impedance ..... 50 Ohms
Operating Temperature ..... -30℃~+70℃
Connectors ..... SMA-Female
Connectors Body ..... Stainless Steel
Housing Material ..... Aluminum 6061
Finish ..... Black Painted
Weight 100g

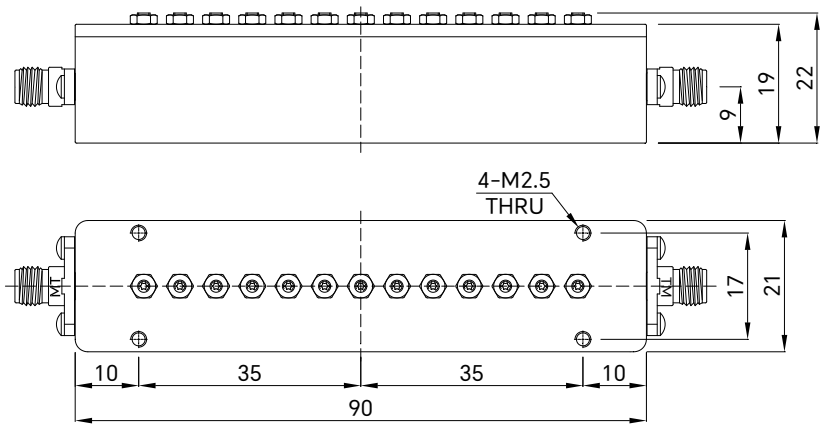

Drawing not to scale, units:mm

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER	DESCRIPTION
TBF-02600270-90S	Cavity Band Pass Filter, 2.6~2.7GHz Stopband Rejection 90dB, 20W, SMA-Female
CAGE CODE / SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.