PART NUMBER
TBF-27802820-30K

REV.	DATE	COMMENTS	INITIAL
1	2020/10/11	ENGINEERING RELEASE	

Specifications

RoHS Compliant

Passband Frequency Range	27800-28200MHz
Center Frequency(F_0)	28000MHz
Passband Insertion Loss	4.0dB max
Passband VSWR	1.5:1 max
Stopband Rejection	30dB min@DC-27600MHz
	30dB min@28400-35000MHz
Power Handling	5W max
Impedance	50 Ohms
Operating Temperature	-10℃~+50℃
Connectors	2.92mm-Female
Finish	Black Painted
Weight	54g

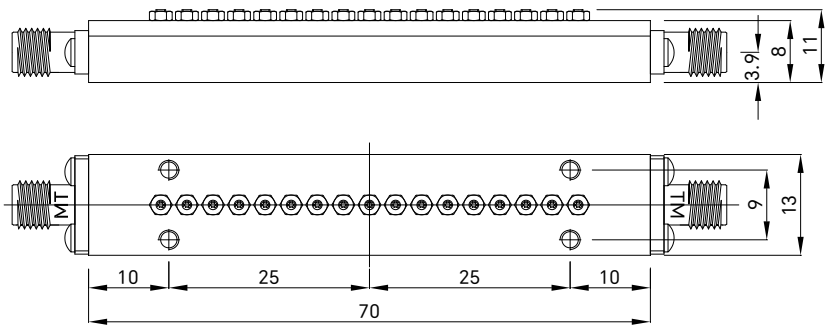

Drawing not to scale, units:mm

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER	DESCRIPTION
TBF-27802820-30K	Cavity Band Pass Filter, Passband 27.8~28.2GHz Stopband Rejection 30dB, 5W, 2.92mm-Female
CAGE CODE / SIGNATURE	

EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.