


PART NUMBER TMPD2-15004400-104	REV.	DATE	COMMENTS	INITIAL
	1	2020/8/15	ENGINEERING RELEASE	

Specifications

Frequency Range	15-44GHz
Insertion Loss	1.8dB max
Nominal Splitter Loss	3.0dB typ
VSWR(input)	1.7:1 max
VSWR(output)	1.7:1 max
Isolation	15dB min
Amplitude Balance	± 1.0dB max
Phase Balance	± 10° max
Impedance	50 Ohm
Power Handling	10W
Connectors	2.4mm-Female(Stainless Steel, Passivated)
Center Contact	Gold Plated Beryllium Copper
Dimensions	25.4 × 15.24 × 10mm
Surface Finish	Black/Blue Painted
Material	Aluminum 6061
Temperature Range	-45°C~+85°C

RoHS Compliant

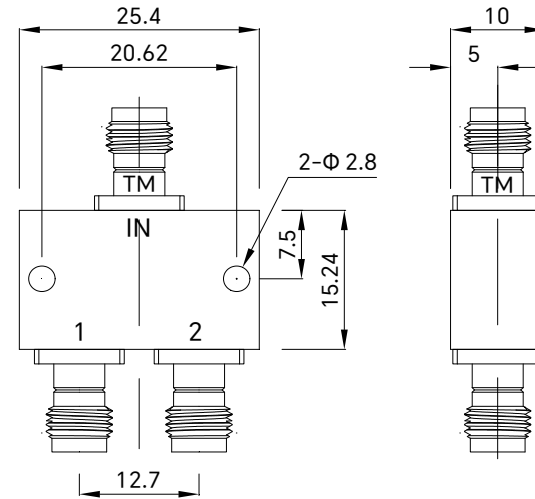

Drawing not to scale, units:mm



www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER TMPD2-15004400-104		DESCRIPTION Power Divider, 2 Way, 15-44GHz 10W, 2.4mm-Female
CAGE CODE	SIGNATURE _____	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		