


PART NUMBER  
**TMPD16-01000300-2S**

REV.	DATE	COMMENTS	INITIAL
1	2023/9/21	ENGINEERING RELEASE	

**Specifications**

Frequency Range	1000-3000MHz
Insertion Loss	3.5dB max
Nominal Splitter Loss	12.04dB typ
Input VSWR	1.3:1 max
Output VSWR	1.5:1 max
Isolation	20dB min
Amplitude Balance	± 1.6dB max
Phase Balance	± 20° max
Impedance	50 Ohms
Power Handling	2W max
Input/Output Connectors	SMA-Female(stainless steel)
Operating Temperature	-40°C~+85°C
Storage Temperature	-55°C~+100°C
Surface Treatment	Black/Blue/Gray Painted
Dimensions	213.8 × 85 × 31mm

**RoHS Compliant**

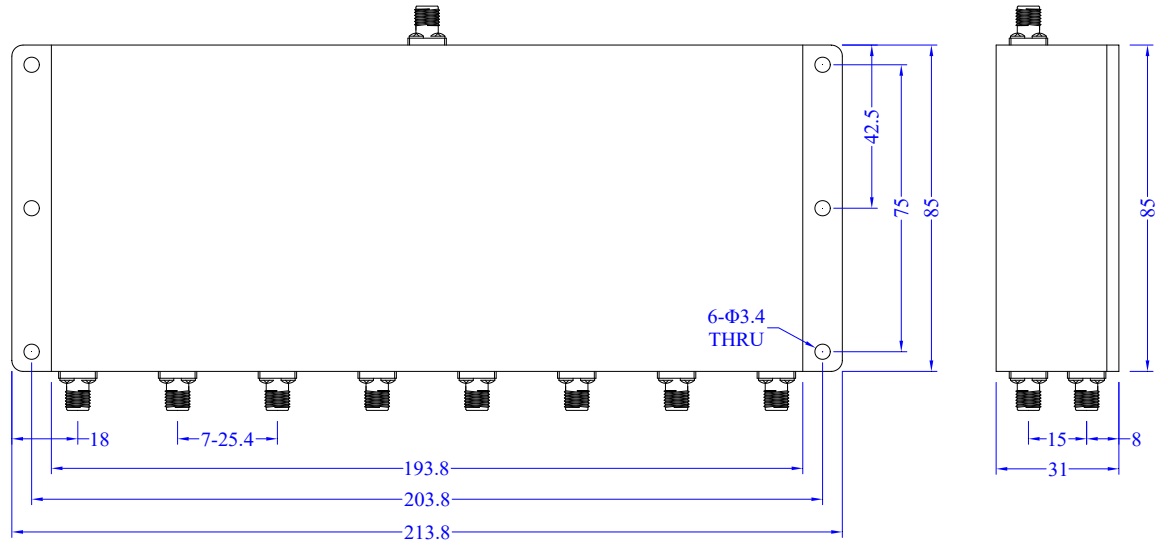

Drawing not to scale, units:mm



www.titan-microwave.com  
Tel: +86 130 866 58398  
Email: sales@titan-microwave.com  
chris@titan-microwave.com

PART NUMBER <b>TMPD16-01000300-2S</b>		DESCRIPTION <b>Power Divider, 16 Way, 1000-3000MHz 2W, SMA-Female</b>
CAGE CODE	SIGNATURE <i>Chris Chen</i>	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		