


PART NUMBER
TMPD16-02000350-20S

REV.	DATE	COMMENTS	INITIAL
1	2021/9/10	ENGINEERING RELEASE	

Specifications

Frequency Range	2000-3500MHz
Insertion Loss	1.5dB max
Nominal Splitter Loss	12.04dB typ
Input VSWR	1.45:1 max
Output VSWR	1.25:1 max
Isolation	18dB min
Amplitude Balance	± 0.8dB max
Phase Balance	± 12° max
Impedance	50 Ohms
Forward Power	20W max
Reverse Power	1W max
Input/Output Connectors	SMA-Female(stainless steel)
Operating Temperature	-40°C~+85°C
Storage Temperature	-55°C~+100°C
Surface Treatment	Black/Blue/Gray Painted
Dimensions	212 × 67 × 12.7mm

RoHS Compliant

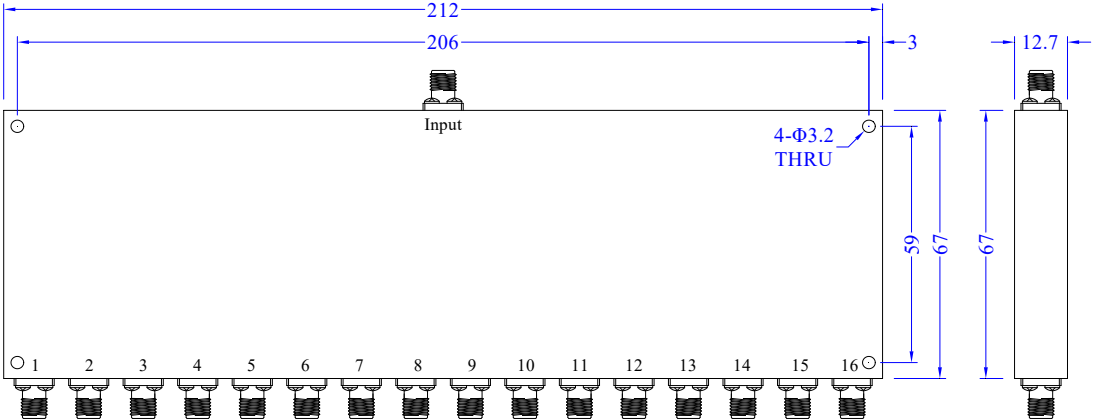

Drawing not to scale, units:mm



www.titan-microwave.com
Tel: +86 130 866 58398
Email: sales@titan-microwave.com
chris@titan-microwave.com

PART NUMBER TMPD16-02000350-20S		DESCRIPTION Power Divider, 16 Way, 2000-3500MHz 20W, SMA-Female
CAGE CODE	SIGNATURE <i>Chris Chen</i>	
EXCEPT AS OTHERWISE PROVIDED BY CONTRACTOR THIS DRAWING OR SPECIFICATION IS PROPERTY OF TITAN MICROWAVE INC. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS.		