

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/11/20	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	10~600MHz
Max Output Power(Psat)	≥54dBm(250W)
Gain	≥53dB
Gain Flatness	≤4±1dB
VSWR Input	≤1.8
Input Power	3±1dBm
Max Input Power	+10dBm
Spurious	≤-65dBc
Harmonic	≤-10dBc
Impedance	50 Ohms
PTT Port	Default OFF, 5V ON
Temperature Protection	Over 80℃ protection with open circuit protection
Operation Current	≤20A
Voltage/Current Reference	+48V/25A
Max Operation Voltage	+50V


► Mechanical Data

Dimensions	211×100×28mm
Input Connector	SMA-Female
Output Connector	N-Female
48V Power Supply Interface	Feedthru Capacitor

► Environmental Data

Operating Temperature	-25℃~+55℃
-----------------------	-----------

- ! Stress above these ratings may cause permanent damage to the device
Radiator/Heatsink required during operation or test

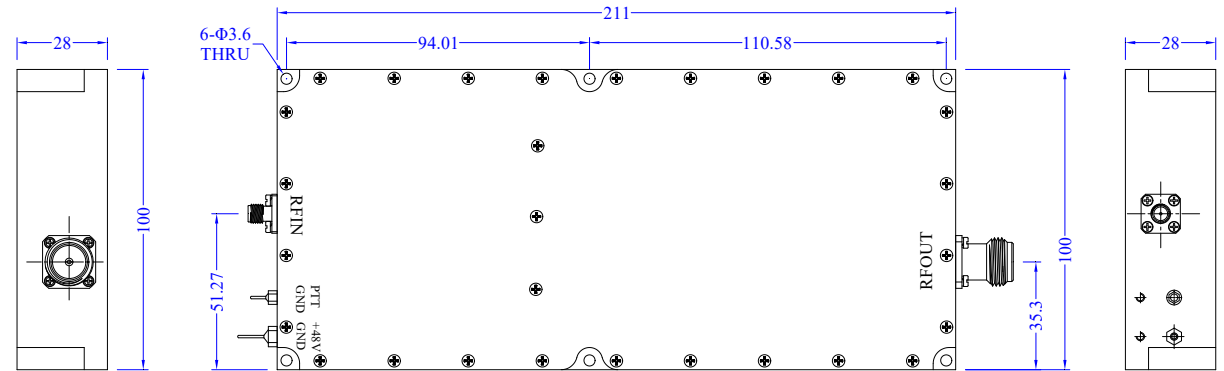

DRAWN: L. Ma 20/11/22		
ENGINEER: J. Zhu 20/11/22		
APPROVED: C. Chen 20/11/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Amplifier, 10-600MHz, Gain 53dB, Output Power 250W, +48V, SMA&N-Female

PART No.:
TMPA-00010060-5354



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY