

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

► Electrical Data

Frequency Range	500-1000MHz
Max Output Power(Psat)	≥53dBm
Gain	≥53dB
Gain Flatness	≤2±1dB
VSWR Input	≤2.0
Input Power	2±1dBm
Max Input Power	+10dBm
Spurious	≤-65dBc
Harmonic	≥-15dBc
Impedance	50 Ohms
PTT Port	Default OFF, 5V ON
Temperature Protection	Over 80°C protection with open circuit protection
Operation Current	≤18~20A
VCC/Current Refence	+32V/25A


► Mechanical Data

Dimensions	358.5×150.5×33.5mm
Input Connector	SMA-Female
Output Connector	N-Female
32V Power Supply Interface	Feedthru Capacitor
Package	1 piece/box

► Environmental Data

Operating Temperature	-25°C~+55°C
-----------------------	-------------

! Stress above these ratings may cause permanent damage to the device
Radiator/Heatsink required during operation or test

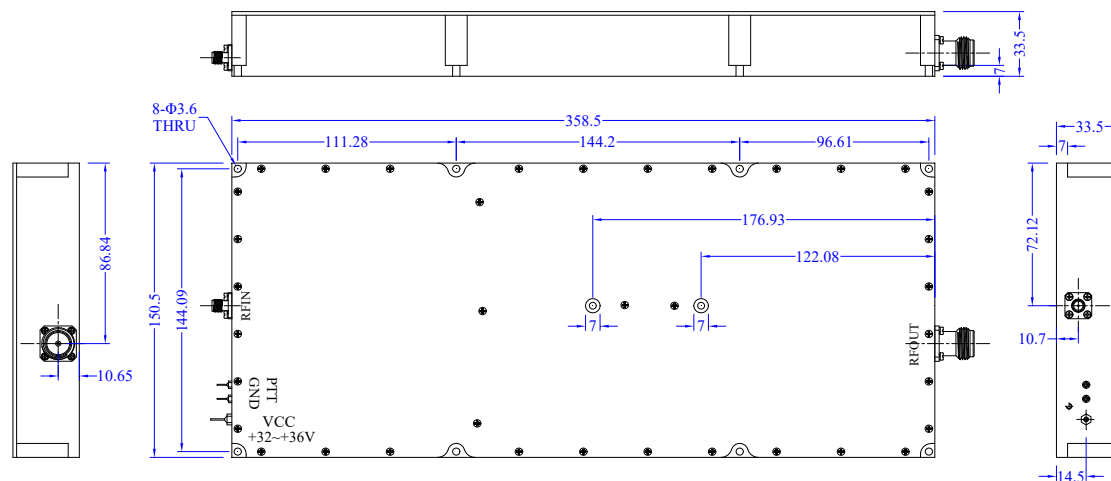

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22		
ENGINEER: J. Zhu 16/04/22		
APPROVED: C. Chen 16/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Power Amplifier,
0.5~1GHz, Gain 53dB,
Output Power 53dBm,
+32V, SMA/N-Female

PART No.:

TMPA-00500100-5353



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------