

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/8/23	C. Chen

## TECHNICAL DATA

### ► Electrical Data(50Ω, 25℃)

Frequency Range	58~63GHz
Output Power(Psat)	37dBm min
Gain	30dB min
Input VSWR	2.0:1 typ
Max Input Power	+20dBm
Impedance	50 Ohms
Operating Voltage	+12V typ
Operating Current	10A typ


### ► Mechanical Data

Dimensions	300×200×40mm
Input Connector	WR-15
Output Connector	WR-15
Power Supply Connector	9-Pin D-Sub

### ► Environmental Data

Operating Temperature	-10℃~+50℃
Storage Temperature	-40℃~+85℃
Relative Humidity(non-condensing)	95% typ

! Stress above these ratings may cause permanent damage to the device

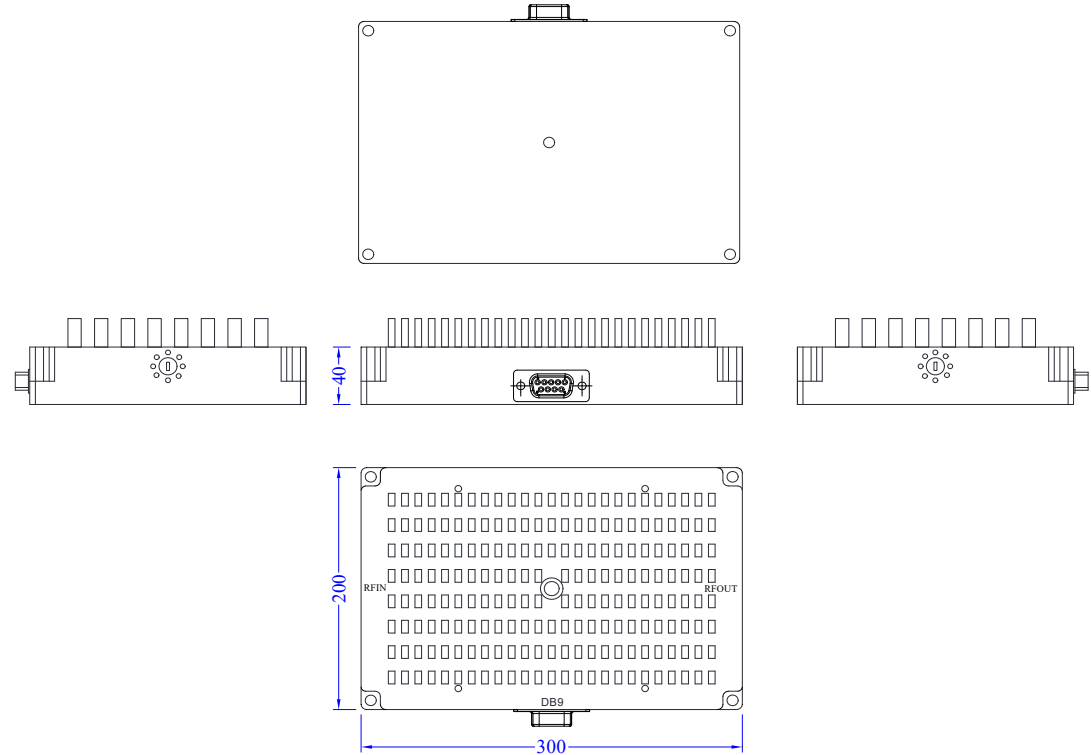

DRAWN: L. Ma 23/08/23		
ENGINEER: J. Zhu 23/08/23		
APPROVED: C. Chen 23/08/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

#### TITLE:

Power Amplifier, 58-63GHz, Gain 30dB,  
Output Power 37dBm,  
+12V, WR-15

#### PART No.:

TMPA-58006300-3037



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY