

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/19	C. Chen

TECHNICAL DATA

Electrical Data

Frequency Range	3.4-3.8GHz
Max Output Power(Psat)	≥47dBm
Gain	≥46dB
Gain Flatness	≤1±1dB
VSWR Input	≤1.7
Input Power	1±1dBm
Max Input Power	+6dBm
Spurious	≤-65dBc
Harmonic	≤-25dBc
Impedance	50 Ohms
PTT Port	Default OFF, 3.3~5V ON
Temperature Protection	Over 80°C protection with open circuit protection
Operation Current	≤7~8A
Operation Voltage	+28V~+32V
VCC/Current Reference	28V/10A


Mechanical Data

Dimensions	200×84.5×25.5mm
Input Connector	SMA-Female
Output Connector	SMA-Female
28V Power Supply Interface	5557-4.2mm power-6
Package	1 piece/box
Weight	≤640g

Environmental Data

Operating Temperature	-40°C~+55°C
-----------------------	-------------

! Stress above these ratings may cause permanent damage to the device
Radiator/Heatsink required during operation or test

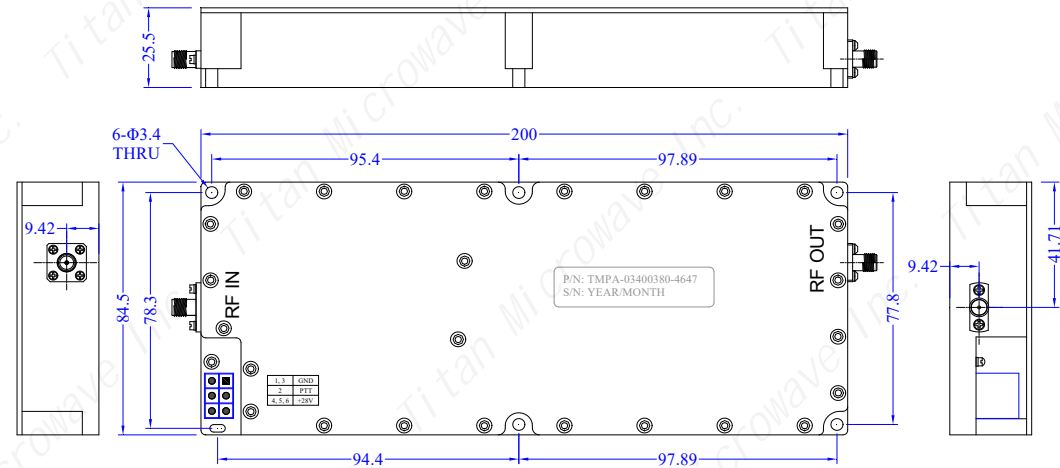

DRAWN: L. Ma 19/04/22		
ENGINEER: J. Zhu 19/04/22		
APPROVED: C. Chen 19/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Amplifier,
3.4~3.8GHz, Gain 46dB,
Output Power 47dBm,
+28V, SMA-Female

PART No.:
TMPA-03400380-4647

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY