

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	1880~1920MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~1860MHz & 1940~5800MHz
Pass Band Insertion Loss	≤2.0dB
Pass Band VSWR	≤1.5:1
Power Handling	≤30W
Impedance	50 Ohms

► Mechanical Data

Dimensions	209×45×22mm
Connectors	SMA-Female
Connector Material	Copper H59
Surface Finish	Black Painted



► Environmental Data

Temperature Range	-30℃~+70℃
-------------------	-----------

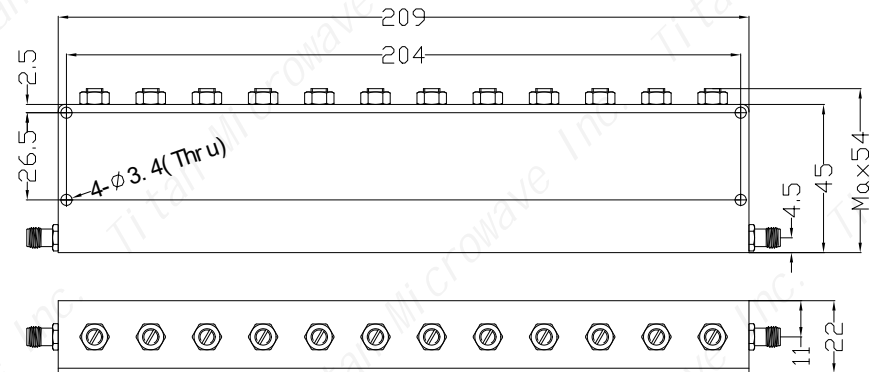

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE: Band Reject Filter, 1.88~1.92GHz, Stop Band Rejection 50dB, 30W, SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. <small>- A Professional RF & Microwave Components Supplier -</small>				
ENGINEER: J. Zhu 12/09/23				www.titan-microwave.com		
APPROVED: C. Chen 12/09/23		 DIMENSIONS IN MILLIMETERS(mm)				
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART No.:	SIZE:	SCALE:	SHEET:	REV:
x	±0.50 [0.019"]					
.x	±0.20 [0.008"]					
.xx	±0.10 [0.004"]					
ANGLES	±1°					