

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

## TECHNICAL DATA

### Electrical Data


Stop Band Frequency	758~788MHz
Stop Band Attenuation	≥40dB
Pass Band Frequency	DC~740MHz & 806~2200MHz
Pass Band Insertion Loss	≤1.2dB
Pass Band VSWR	≤1.5:1
Power Handling	≤10W
Impedance	50 Ohms

### Mechanical Data

Dimensions	265×88×28mm
Connectors	SMA-Female
Connector Material	Copper H59
Surface Finish	Black Painted

### Environmental Data

Temperature Range	-30℃~+70℃
-------------------	-----------

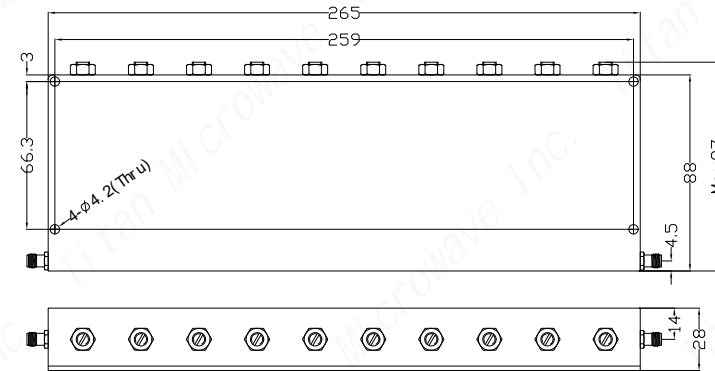

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Band Reject Filter,  
758~788MHz, Stop Band  
Rejection 40dB, 10W,  
SMA-Female

**PART No.:**  
TRF-758M788M-40S

**成都巨人微波**  
**TITAN MICROWAVE INC.**  
- A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

<b>SIZE:</b> A4	<b>SCALE:</b>	<b>SHEET:</b> 1/1	<b>REV:</b> A
--------------------	---------------	----------------------	------------------

**Notes:**

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY