

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Stop Band Frequency	1750~1790MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~1730MHz & 1810~5000MHz
Pass Band Insertion Loss	≤2.0dB
Pass Band VSWR	≤1.5:1
Power Handling	≤20W
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	245×50×22mm
Connectors	SMA-Female
Connector Material	Copper H59
Surface Finish	Black Painted



### ► Environmental Data

Temperature Range	-10℃~+50℃
-------------------	-----------

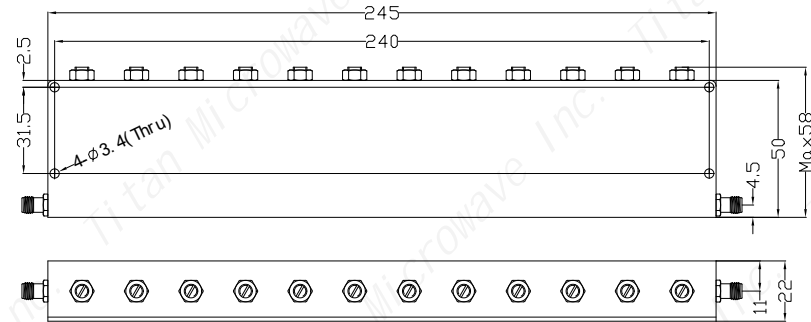

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23	TITLE: Band Reject Filter, 1.75~1.79GHz, Stop Band Rejection 50dB, 20W, SMA-Female	 <b>成都巨人微波</b> <b>TITAN MICROWAVE INC.</b> <small>- A Professional RF &amp; Microwave Components Supplier -</small>				
ENGINEER: J. Zhu 12/09/23				<a href="http://www.titan-microwave.com">www.titan-microwave.com</a>		
APPROVED: C. Chen 12/09/23		 DIMENSIONS IN MILLIMETERS(mm)				
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART No.: TRF-01750179-50S	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
x	±0.50 [0.019"]					
.x	±0.20 [0.008"]					
.xx	±0.10 [0.004"]					
ANGLES	±1°					