

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	920~960MHz
Stop Band Attenuation	≥45dB
Pass Band Frequency	DC~895MHz & 985~2500MHz
Pass Band Insertion Loss	≤1.5dB
Pass Band VSWR	≤1.5:1
Power Handling	≤50W
Impedance	50 Ohms

► Mechanical Data

Dimensions	221×78.5×28mm
Connectors	N-Male & N-Female
Connector Material	Copper H59
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-20℃~+60℃
-------------------	-----------

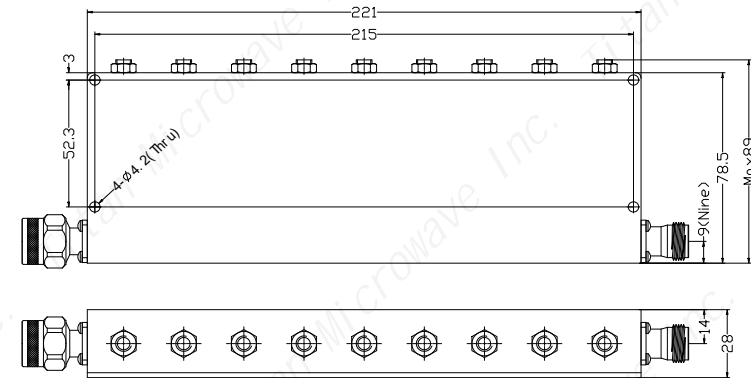

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
 Band Reject Filter,
 920~960MHz, Stop Band
 Rejection 45dB, 50W, N-
 Male/Female



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

PART No.:
 TRF-920M960M-45N

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY