

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	860~920MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~800MHz & 1000~2500MHz
Pass Band Insertion Loss	≤2.0dB
Pass Band Return Loss	≥12dB
Power Handling	≤10W
Impedance	50 Ohms

► Mechanical Data

Dimensions	187×70×28mm
Connectors	SMA-Male & SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-10℃~+50℃
-------------------	-----------

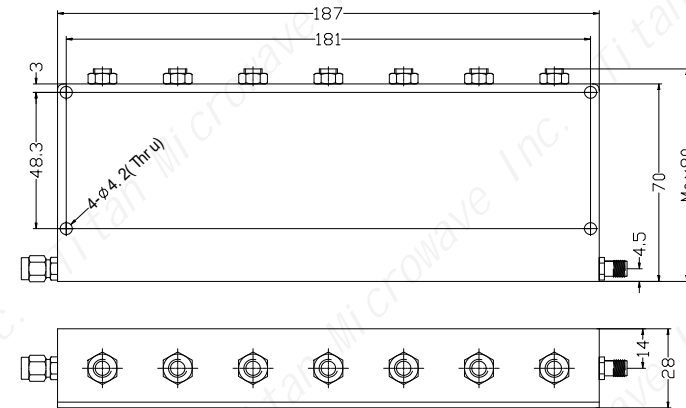

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Band Reject Filter,
860~920MHz, Stop Band
Rejection 50dB, 10W,
SMA-Male/Female

PART No.:

TRF-860M920M-50S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE:
A4

SCALE:

SHEET:
1/1

REV:
A