

TECHNICAL DATA

► Electrical Data

Frequency Range	1700~2700MHz
Insertion Loss	0.15dB max
VSWR	1.15:1 max
Isolation	30dB min
Phase Balance	±1.5°
Amplitude Balance	±0.25dB max
Power Handling	200W


► Mechanical Data

Dimensions	14.22×5.08×2mm
Connector Type	SMD
Surface Finish	Immersion Gold
	-Prevent surface from oxidation and scratch


► Environmental Data

Operating Temperature	-55℃~+105℃
-----------------------	------------


Pin Configuration




Top View



Side View



Bottom View

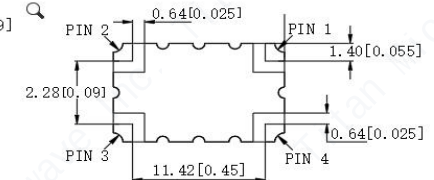

Configuration	Pin 1	Pin 2	Pin 3	Pin 4
Splitter	Input	Isolated	-3dB∠θ-90°	-3dB∠θ
Splitter	Isolated	Input	-3dB∠θ	-3dB∠θ-90°
Splitter	-3dB∠θ-90°	-3dB∠θ	Input	Isolated
Splitter	-3dB∠θ	-3dB∠θ-90°	Isolated	Input
Combiner	A∠θ-90°	A∠θ	Isolated	Output
Combiner	A∠θ	A∠θ-90°	Output	Isolated
Combiner	Isolated	Output	A∠θ-90°	A∠θ
Combiner	Output	Isolated	A∠θ	A∠θ-90°

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 22/11/22
ENGINEER: J. Zhu 22/11/22
APPROVED: C. Chen 22/11/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:
SMD 3dB 90° High Power Hybrid Coupler, 1700~2700MHz, 200W
PART No.:
TMHC2200E03

 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
www.titan-microwave.com			
 DIMENSIONS IN MILLIMETERS(mm)			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A